

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED  
OMB No. 1004-0136  
Expires January 31, 2004

5. Lease Serial No.  
UTU-19267

6. If Indian, Allottee or Tribe Name  
N/A

7. If Unit or CA Agreement, Name and No.  
N/A

8. Lease Name and Well No.  
Federal 4-28-9-18

9. API Well No.  
43-047-39672

10. Field and Pool, or Exploratory  
Sagebrush Eight mile pad North

11. Sec., T., R., M., or Blk. and Survey or Area  
NW/NW Sec. 28, T9S R18E

12. County or Parish  
Uintah

13. State  
UT

1a. Type of Work: ☒ DRILL ☐ REENTER

1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone

2. Name of Operator  
Newfield Production Company

3a. Address  
Route #3 Box 3630, Myton UT 84052

3b. Phone No. (include area code)  
(435) 646-3721

4. Location of Well (Report location clearly and in accordance with any State requirements. \*)  
At surface NW/NW 838' FNL 668' FWL 593 469X 40.006895  
At proposed prod. zone 44288874 - 109.904929

14. Distance in miles and direction from nearest town or post office\*  
Approximatley 20.9 miles southeast of Myton, Utah

15. Distance from proposed\*  
location to nearest  
property or lease line, ft.  
(Also to nearest drig. unit line, if any) Approx. 838' f/lse, NA' f/unit

16. No. of Acres in lease  
1,918.84

17. Spacing Unit dedicated to this well  
40 Acres

18. Distance from proposed location\*  
to nearest well, drilling, completed,  
applied for, on this lease, ft. Approx. 1492'

19. Proposed Depth  
5500'

20. BLM/BIA Bond No. on file  
UTB000192

21. Elevations (Show whether DF, KDB, RT, GL, etc.)  
5128' GL

22. Approximate date work will start\*  
1st Quarter 2008


23. Estimated duration  
Approximately seven (7) days from spud to rig release.

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:


1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature   
Title Regulatory Specialist

Name (Printed/Typed)  
Mandie Crozier

Date  
9/28/07

Approved by (Signature)   
Title

Name (Printed/Typed)  
BRADLEY G. HILL  
Office ENVIRONMENTAL MANAGER

Date  
10-03-07

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

RECEIVED

OCT 01 2007

Federal Approval of this  
Action is Necessary

DIV. OF OIL, GAS & MINING

FEDERAL 4-28-9-16  
(Surface Location) NAD 83  
LATITUDE = 40° 00' 24.69"  
LONGITUDE = 109° 54' 20.10"

NEWFIELD PRODUCTION COMPANY  
FEDERAL #4-28-9-18  
NW/NW SECTION 28, T9S, R18E  
UINTAH COUNTY, UTAH

ONSHORE ORDER NO. 1

**DRILLING PROGRAM**

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1065'
Green River	1065'
Wasatch	5500'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation 1065' – 5500' - Oil

4. **PROPOSED CASING PROGRAM**

Please refer to the Monument Butte Field Standard Operation Procedure (SOP).

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

Please refer to the Monument Butte Field SOP. See Exhibit "C".

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

Please refer to the Monument Butte Field SOP.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Please refer to the Monument Butte Field SOP.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

Please refer to the Monument Butte Field SOP.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

The anticipated maximum bottom hole pressure is 1800 psi. It is not anticipated that abnormal temperatures will be encountered.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

Please refer to the Monument Butte Field SOP.

**NEWFIELD PRODUCTION COMPANY  
FEDERAL #4-28-9-18  
NW/NW SECTION 28, T9S, R18E  
UINTAH COUNTY, UTAH**

**ONSHORE ORDER NO. 1**

**MULTI-POINT SURFACE USE & OPERATIONS PLAN**

**1. EXISTING ROADS**

See attached Topographic Map "A"

To reach Newfield Production Company well location site Federal #4-28-9-18 located in the NW 1/4 NW 1/4 Section 28, T9S, R18E, Uintah County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles  $\pm$  to the junction of this highway and UT State Hwy 53; proceed southeasterly along Hwy 53 - 14.9 miles  $\pm$  to it's junction with an existing dirt road to the northeast; proceed northeasterly - 1.8 miles  $\pm$  to it's junction with an existing road to the south; proceed southeasterly - 2.5 miles  $\pm$  to it's junction with an existing road to the northeast; proceed northeasterly - 0.3 miles  $\pm$  to it's junction with the beginning of the proposed access road to the south; proceed southerly along the proposed access road - 50'  $\pm$  to the proposed well location.

**2. PLANNED ACCESS ROAD**

See Topographic Map "B" for the location of the proposed access road.

**3. LOCATION OF EXISTING WELLS**

Refer to Exhibit "B".

**4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

All permanent surface equipment will be painted Carlsbad Canyon.  
Please refer to the Monument Butte Field Standard Operating Procedure (SOP).

**5. LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District  
Water Right: 43-10136

Neil Moon Pond  
Water Right: 43-11787

Maurice Harvey Pond  
Water Right: 47-1358

Newfield Collector Well  
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

Please refer to the Monument Butte Field SOP. See Exhibit "A".

6. **SOURCE OF CONSTRUCTION MATERIALS**

Please refer to the Monument Butte Field SOP.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

Please refer to the Monument Butte Field SOP.

8. **ANCILLARY FACILITIES**

Please refer to the Monument Butte Field SOP.

9. **WELL SITE LAYOUT**

See attached Location Layout Diagram.

10. **PLANS FOR RESTORATION OF SURFACE**

Please refer to the Monument Butte Field SOP.

11. **SURFACE OWNERSHIP** - Bureau Of Land Management (Proposed location and access roads leading to).

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #07-315, 9/19/07. Paleontological Resource Survey prepared by, Wade E. Miller, 9/1/07. See attached report cover pages, Exhibit "D".

Newfield Production Company requests 50' of disturbed area be granted in Lease UTU-19267 to allow for construction of the planned access road. **Refer to Topographic Map "B"**. For the planned access road a temporary width of 60' will be needed for construction purposes with a permanent width of 30' and a running surface of 18'. The construction phase of the planned access road will last approximately (5) days. The planned access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Newfield Production Company requests 50' of disturbed area be granted in Lease UTU-19267 to allow for construction of the proposed surface gas lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line, with a permanent width of 30' upon completion of the proposed gas lines. The construction phase of the proposed gas lines will last approximately (5) days. Both lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** For a ROW plan of development, please refer to the Monument Butte Field SOP.

**Water Disposal**

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

**Threatened, Endangered, And Other Sensitive Species**

**Mountain Plover:** If new construction or surface disturbing activities are scheduled to occur between May 1 and June 15, detailed surveys of the area within 0.5 mile of the proposed location and within 300 feet of proposed access routes must be conducted to detect the presence of mountain plovers. All surveys must be conducted in accordance with the survey protocols outlined in the most recent USFWS Survey Protocol. Surveys must be completed prior to initiating new construction or surface disturbing activities. No new construction or surface disturbing activities will be allowed between March 15 and August 15 within a 0.5 mile radius of any documented mountain plover nest site.

**Burrowing Owl:** Due to the proximity of the location to active prairie dog towns, there is the potential to encounter nesting burrowing owls between April 1 and August 15. If new construction or surface disturbing activities are scheduled between April 1 and August 15, pre-construction surveys will be conducted to detect the presence of nesting burrowing owls within 0.5 mile of any new construction or surface disturbing activity (see Vernal BLM Field Office Protocol). No new construction or surface disturbing activities will be allowed between April 1 and August 15 within a 0.5 mile radius of any active burrowing owl nest.

**Reserve Pit Liner**

A 16 mil liner with felt is required. Please refer to the Monument Butte Field SOP.

**Location and Reserve Pit Reclamation**

Please refer to the Monument Butte Field SOP.

The following seed mixture will be used on the topsoil stockpile, to the recontoured surface of the reserve pit, and for final reclamation: (All poundages are in pure live seed)

Shadscale	<i>Atriplex Confertifolia</i>	6 lbs/acre
Squirrell Tail		6 lbs/acre

**Details of the On-Site Inspection**

The proposed Federal #4-28-9-18 was on-sited on 9/26/07. The following were present; Dave Allred (Newfield Production), Chuck MacDonald (Bureau of Land Management), and Brandon McDonald (Bureau of Land Management). Weather conditions were clear and ground cover was 100% open.

**13. LESSEE'S OR OPERATORS REPRESENTATIVE AND CERTIFICATION**

Representative

Name: Dave Allred  
Address: Route #3 Box 3630  
Myton, UT 84052  
Telephone: (435) 646-3721

Certification


Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #4-28-9-18 NW/NW Section 28, Township 9S, Range 18E: Lease UTU-19267 Uintah County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by US Specialty Insurance #B001832.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true

and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

9/28/07

Date



Mandie Crozier


Regulatory Specialist

Newfield Production Company

# NEWFIELD PRODUCTION COMPANY

FEDERAL 4-28-9-18

Section 28, T9S, R18E, S.L.B.&M.

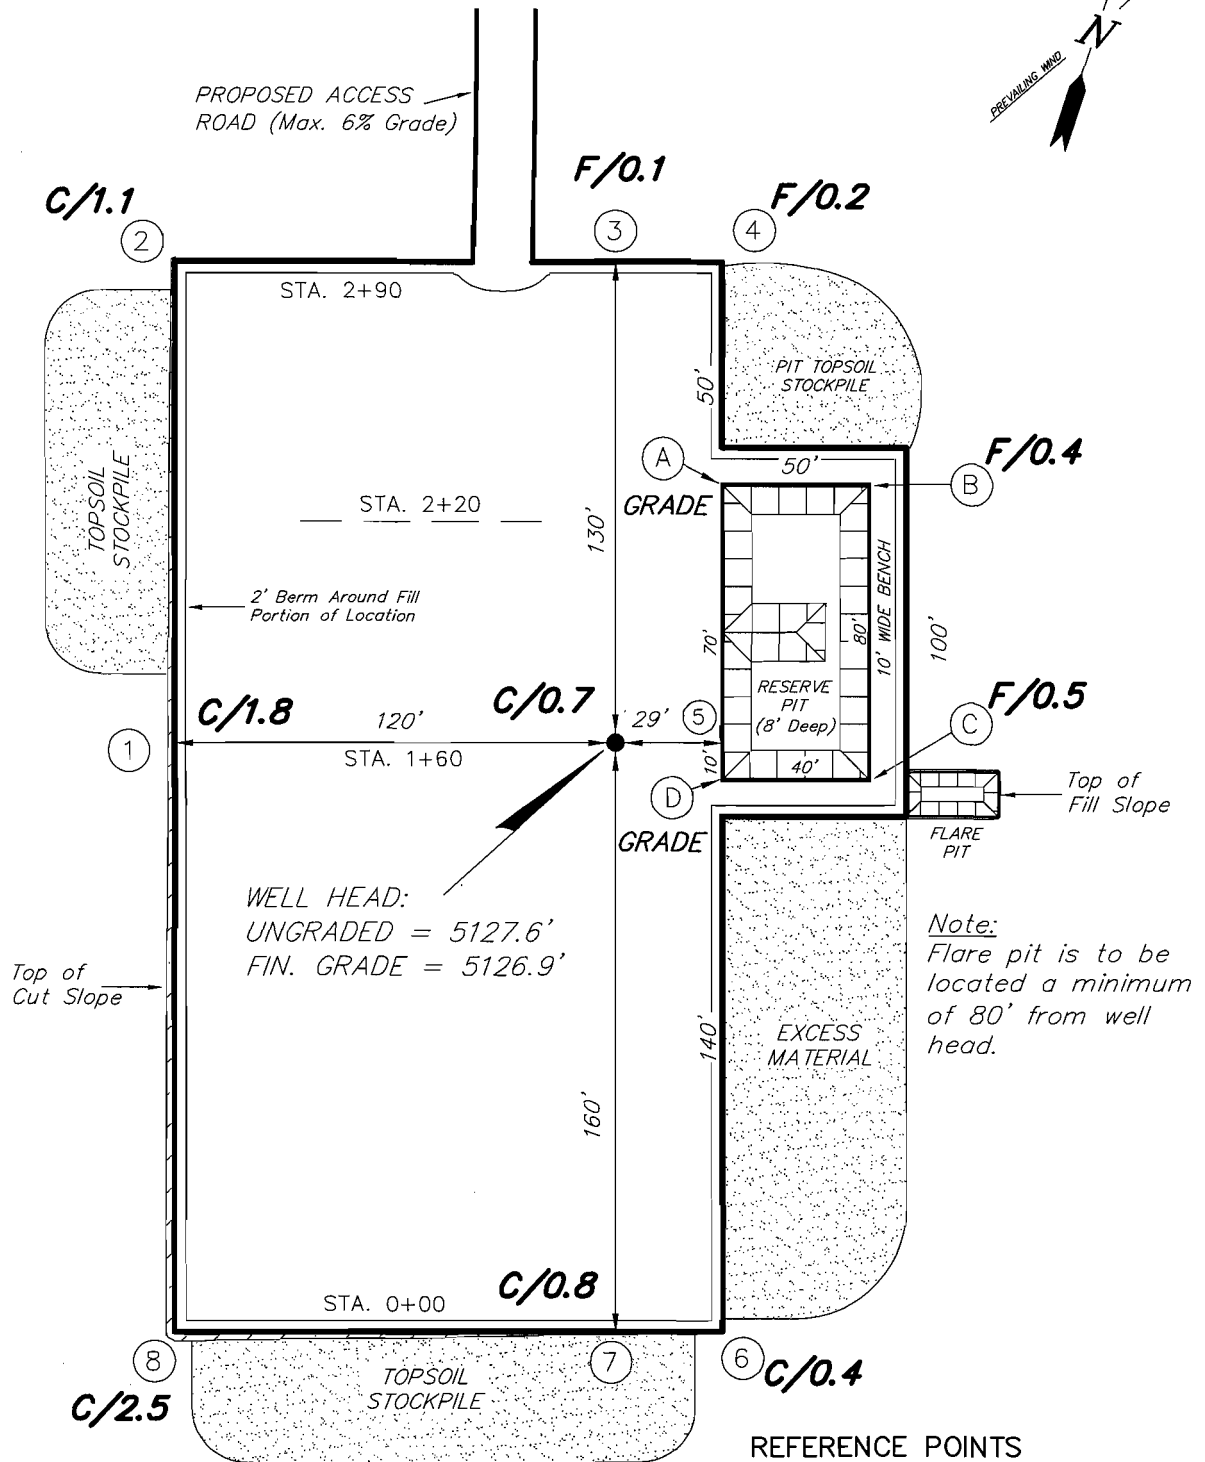

## REFERENCE POINTS




210' SOUTHERLY - 5128.0  
260' SOUTHERLY - 5128.2'  
170' WESTERLY - 5129.5'  
220' WESTERLY - 5130.1'

SURVEYED BY: C.M.	DATE SURVEYED: 6-27-07
DRAWN BY: M.W.	DATE DRAWN: 7-25-07
SCALE: 1" = 50'	REVISED:

**Tri State** (435) 781-2501  
Land Surveying, Inc.  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078



**NEWFIELD PRODUCTION COMPANY**  
**CROSS SECTIONS**  
**FEDERAL 4-28-9-18**

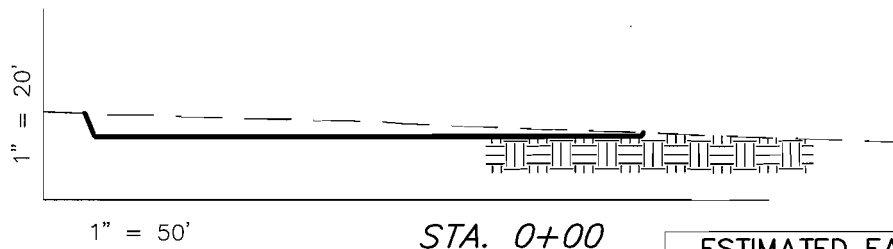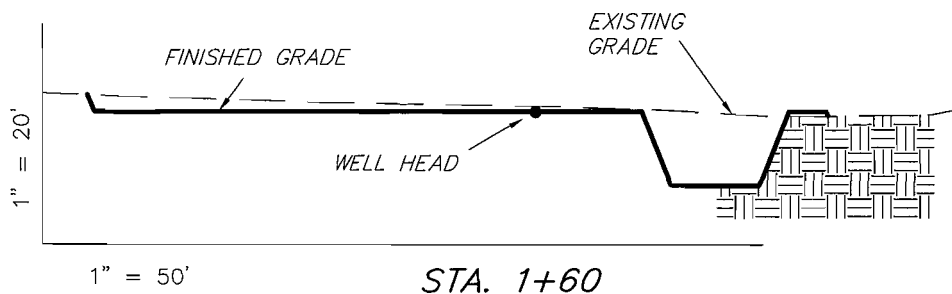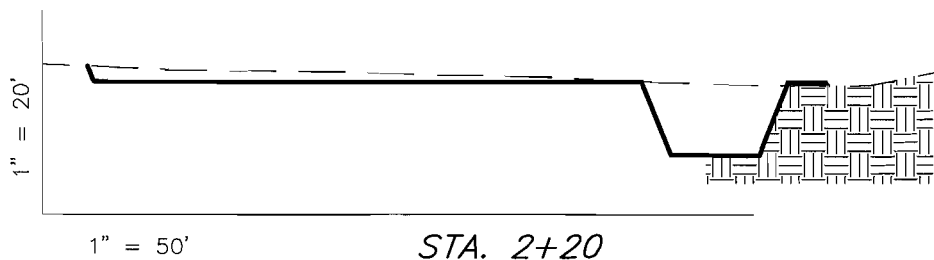

NOTE:  
 UNLESS OTHERWISE NOTED  
 CUT SLOPES ARE AT 1:1  
 FILL SLOPES ARE AT 1.5:1

**ESTIMATED EARTHWORK QUANTITIES**  
 (No Shrink or swell adjustments have been used)  
 (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	870	170	Topsoil is not included in Pad Cut	700
PIT	640	0		640
TOTALS	1,510	170	920	1,340


SURVEYED BY: C.M.      DATE SURVEYED: 6-27-07  
 DRAWN BY: M.W.      DATE DRAWN: 7-25-07  
 SCALE: 1" = 50'      REVISED:

*Tri State* (435) 781-2501  
 Land Surveying, Inc.  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

# NEWFIELD PRODUCTION COMPANY

## TYPICAL RIG LAYOUT

### FEDERAL 4-28-9-18

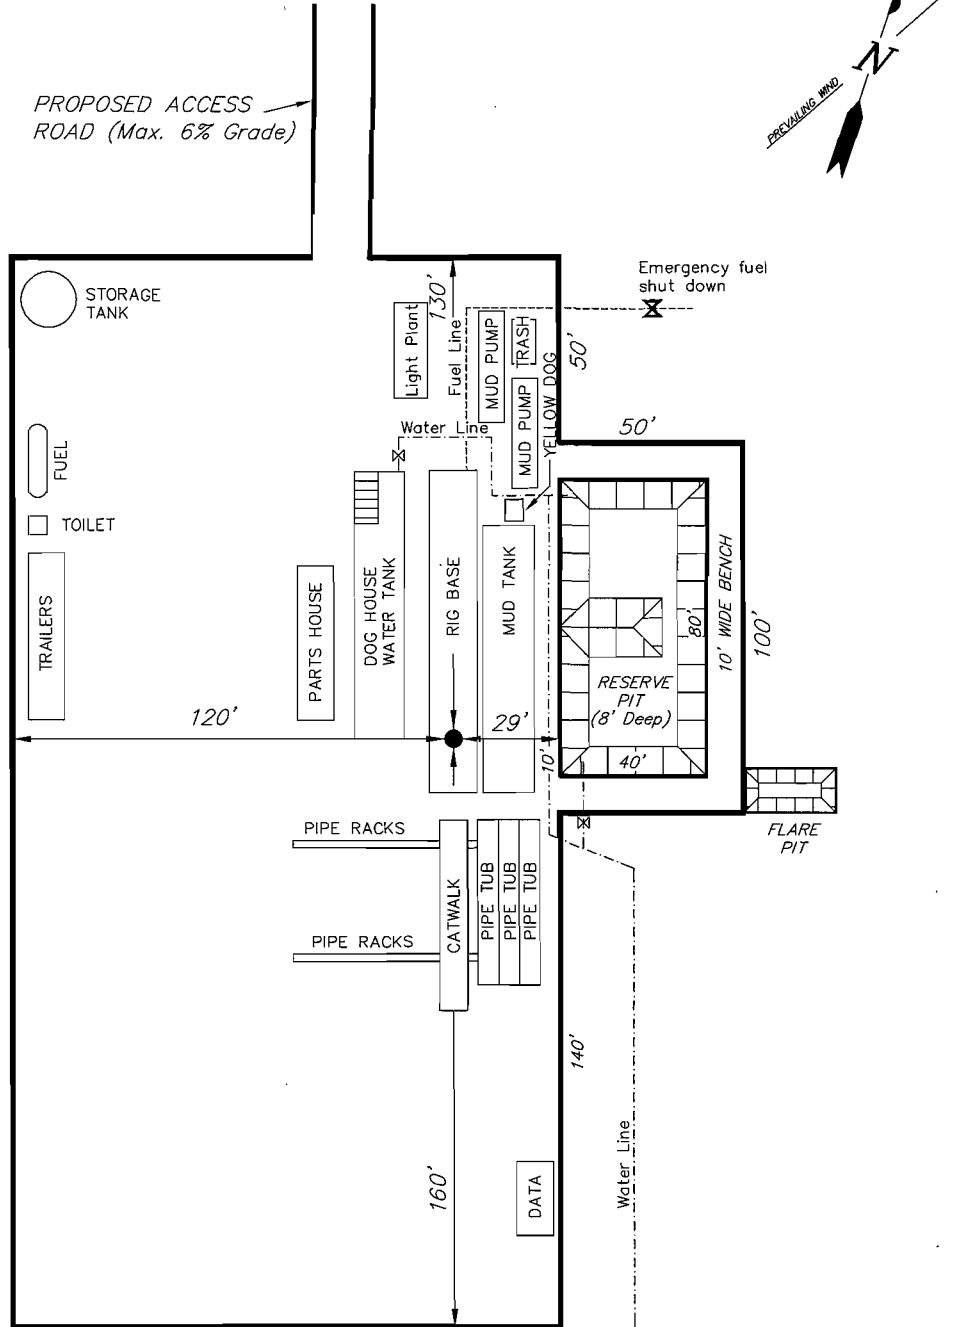

SURVEYED BY: C.M.	DATE SURVEYED: 6-27-07
DRAWN BY: M.W.	DATE DRAWN: 7-25-07
SCALE: 1" = 50'	REVISED:

**Tri State** (435) 781-2501  
**Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

# Newfield Production Company


## Proposed Site Facility Diagram

Federal 4-28-9-18

NW/NW Sec. 28, T9S, R18E

Uintah County, Utah

UTU-19267

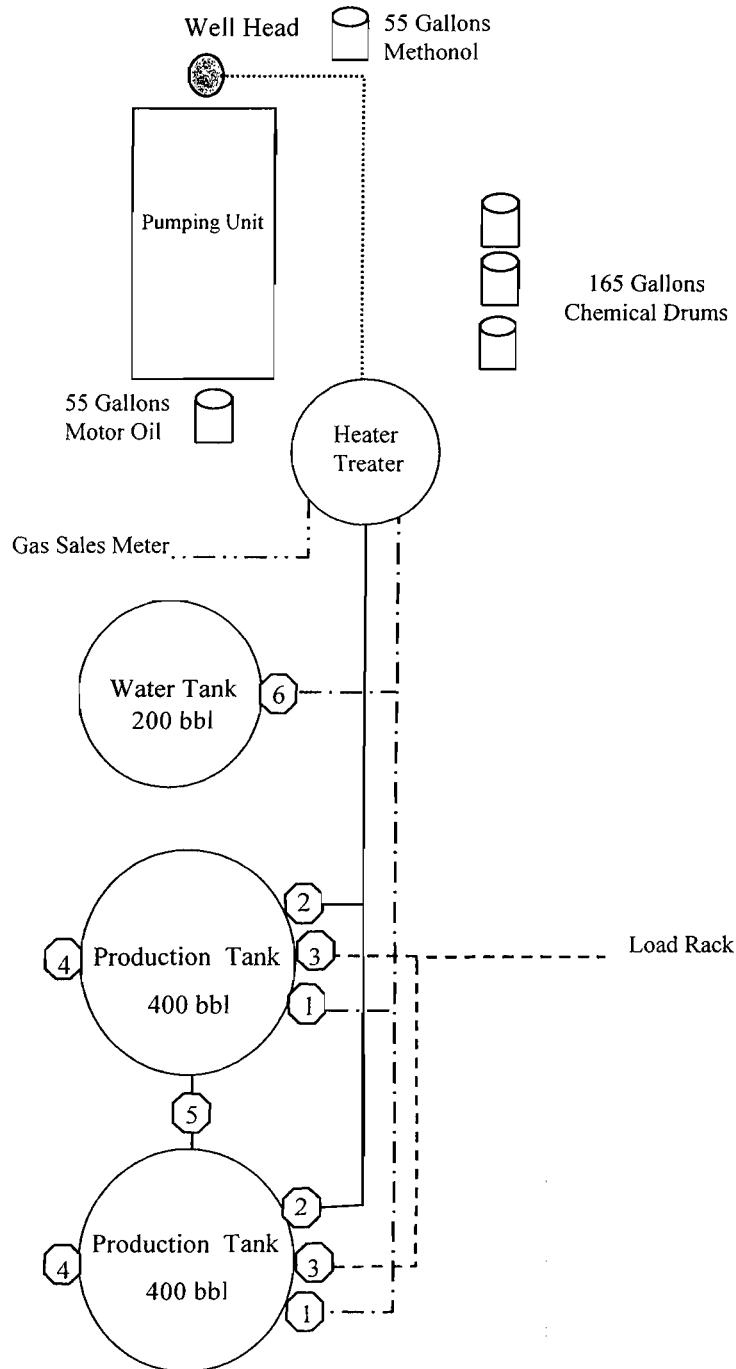

### Legend

Emulsion Line	.....
Load Rack	-----
Water Line	-.-.-.-
Gas Sales	.....
Oil Line	————

### Production Phase:

- 1) Valves 1, 3, and 4 sealed closed
- 2) Valves 2, 5, and 6 sealed open

### Sales Phase:


- 1) Valves 1, 2, 4, 5, and 6 sealed closed
- 2) Valve 3 open

### Draining Phase:

- 1) Valves 1 and 6 open

Diked Section



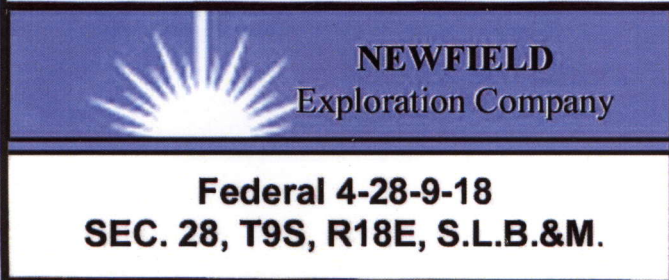

**Legend**


Existing Road

Proposed Access

**TOPOGRAPHIC MAP**

**"A"**



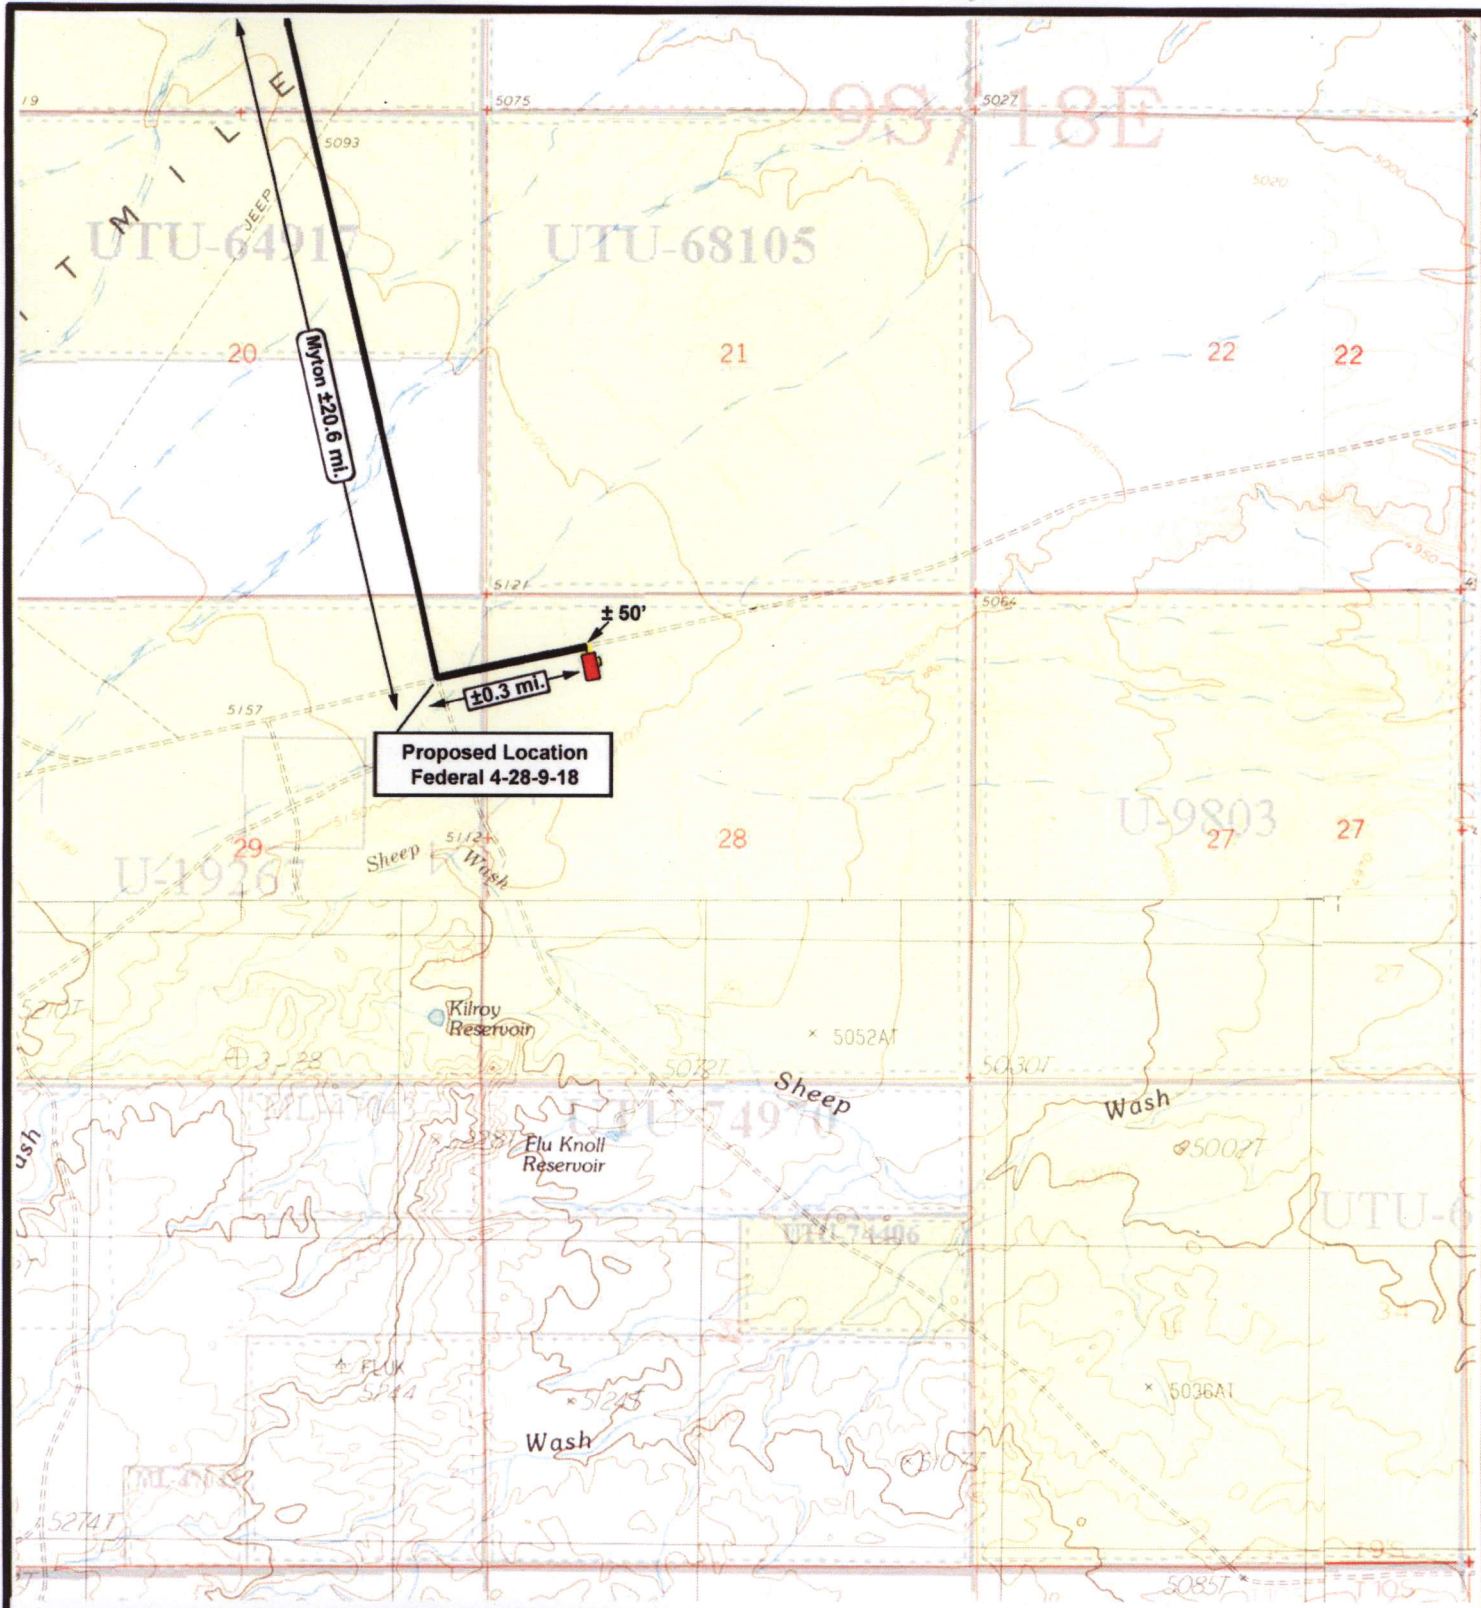

**NEWFIELD**  
Exploration Company

**Federal 4-28-9-18**  
**SEC. 28, T9S, R18E, S.L.B.&M.**



**Tri-State**  
Land Surveying Inc.  
(435) 781-2501

180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'

DRAWN BY: nc

DATE: 07-27-2007


**Legend**

Existing Road  
 Proposed Access

TOPOGRAPHIC MAP

**"B"**



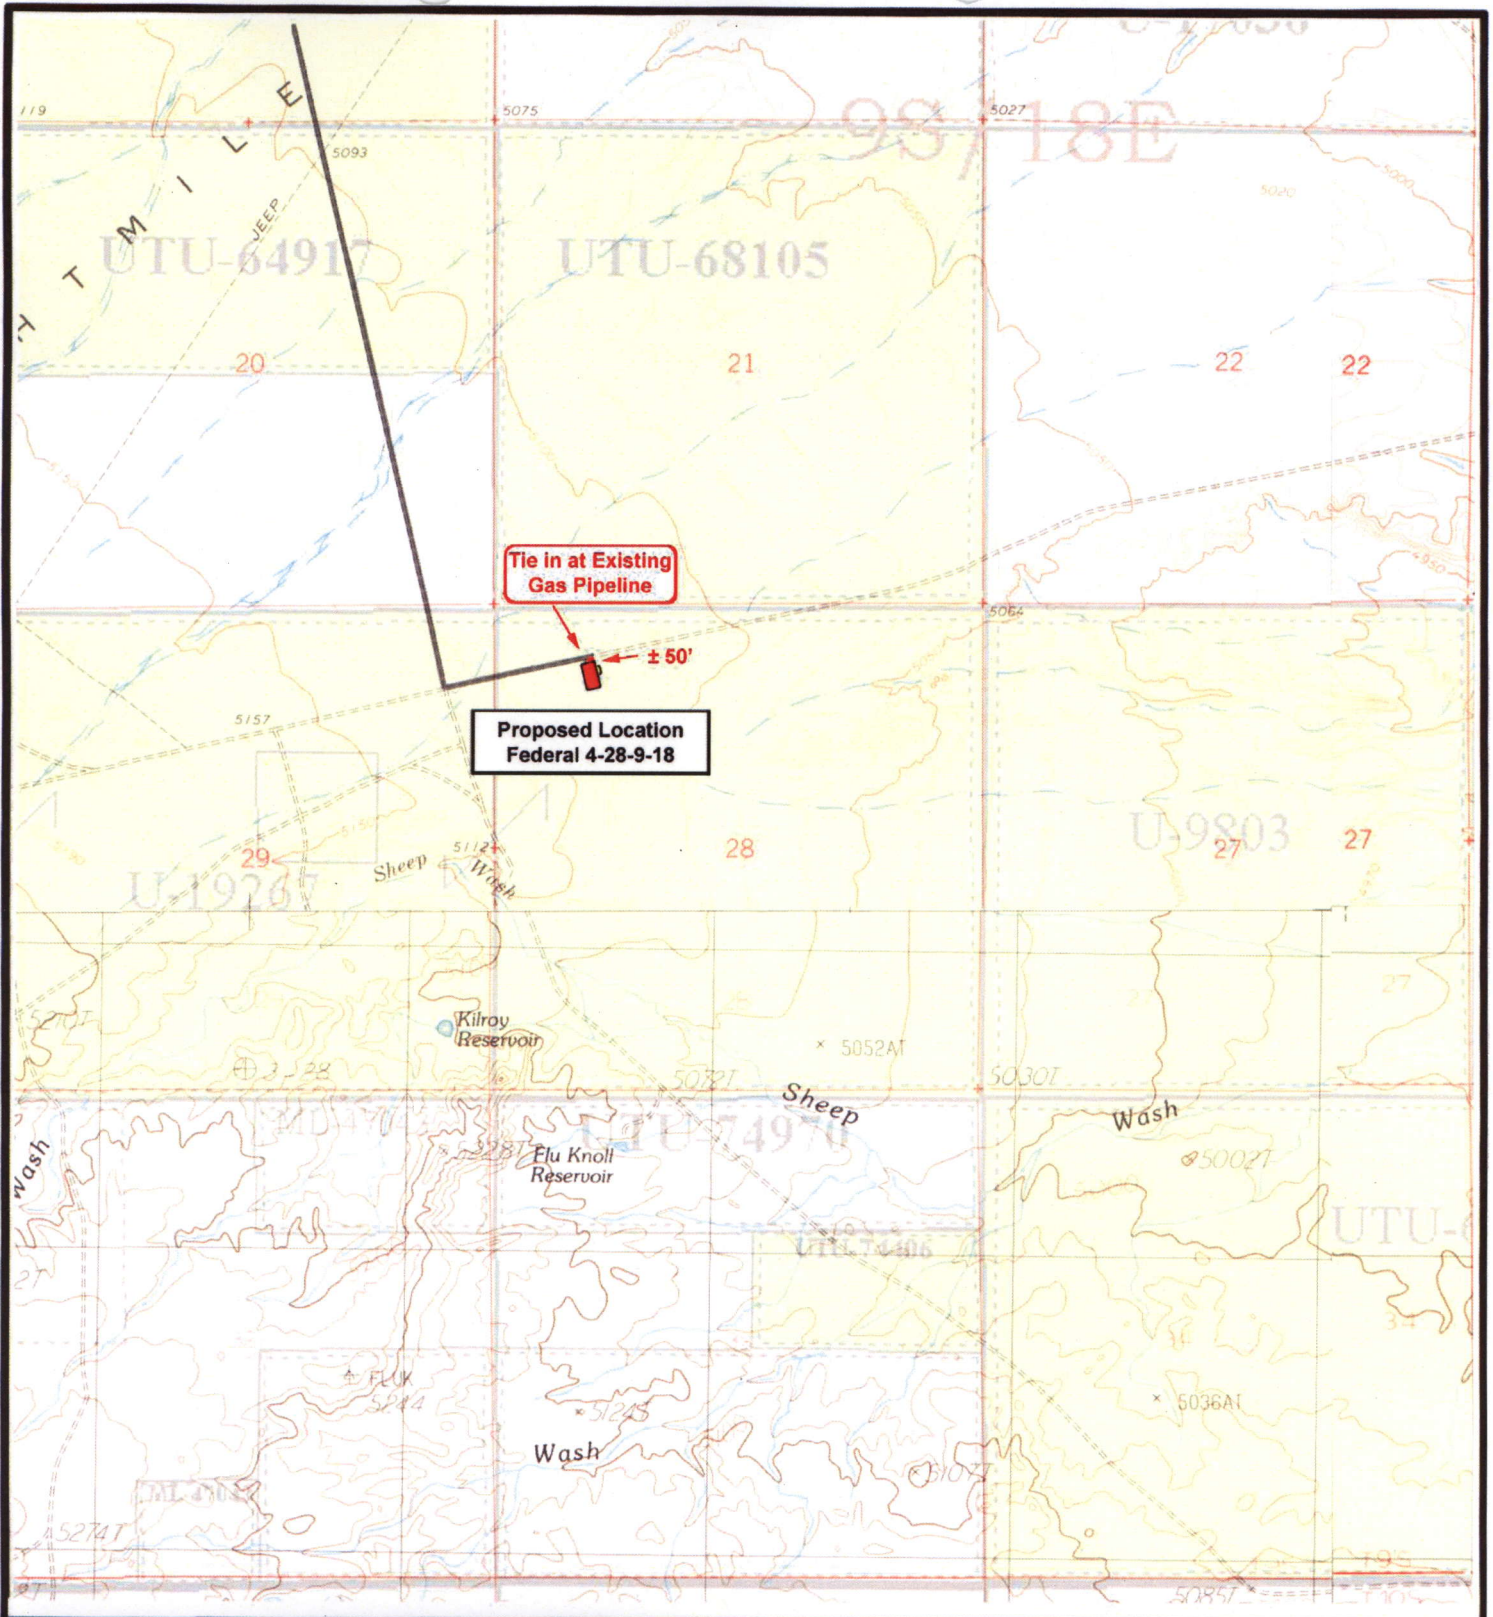

**NEWFIELD**  
Exploration Company

**Federal 4-28-9-18**  
**SEC. 28, T9S, R18E, S.L.B.&M.**



**Tri-State**  
Land Surveying Inc.  
(435) 781-2501  
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1"=2,000'

DRAWN BY: nc

DATE: 07-27-2007


**Legend**

- Roads
- Proposed Gas Line


TOPOGRAPHIC MAP




**"C"**

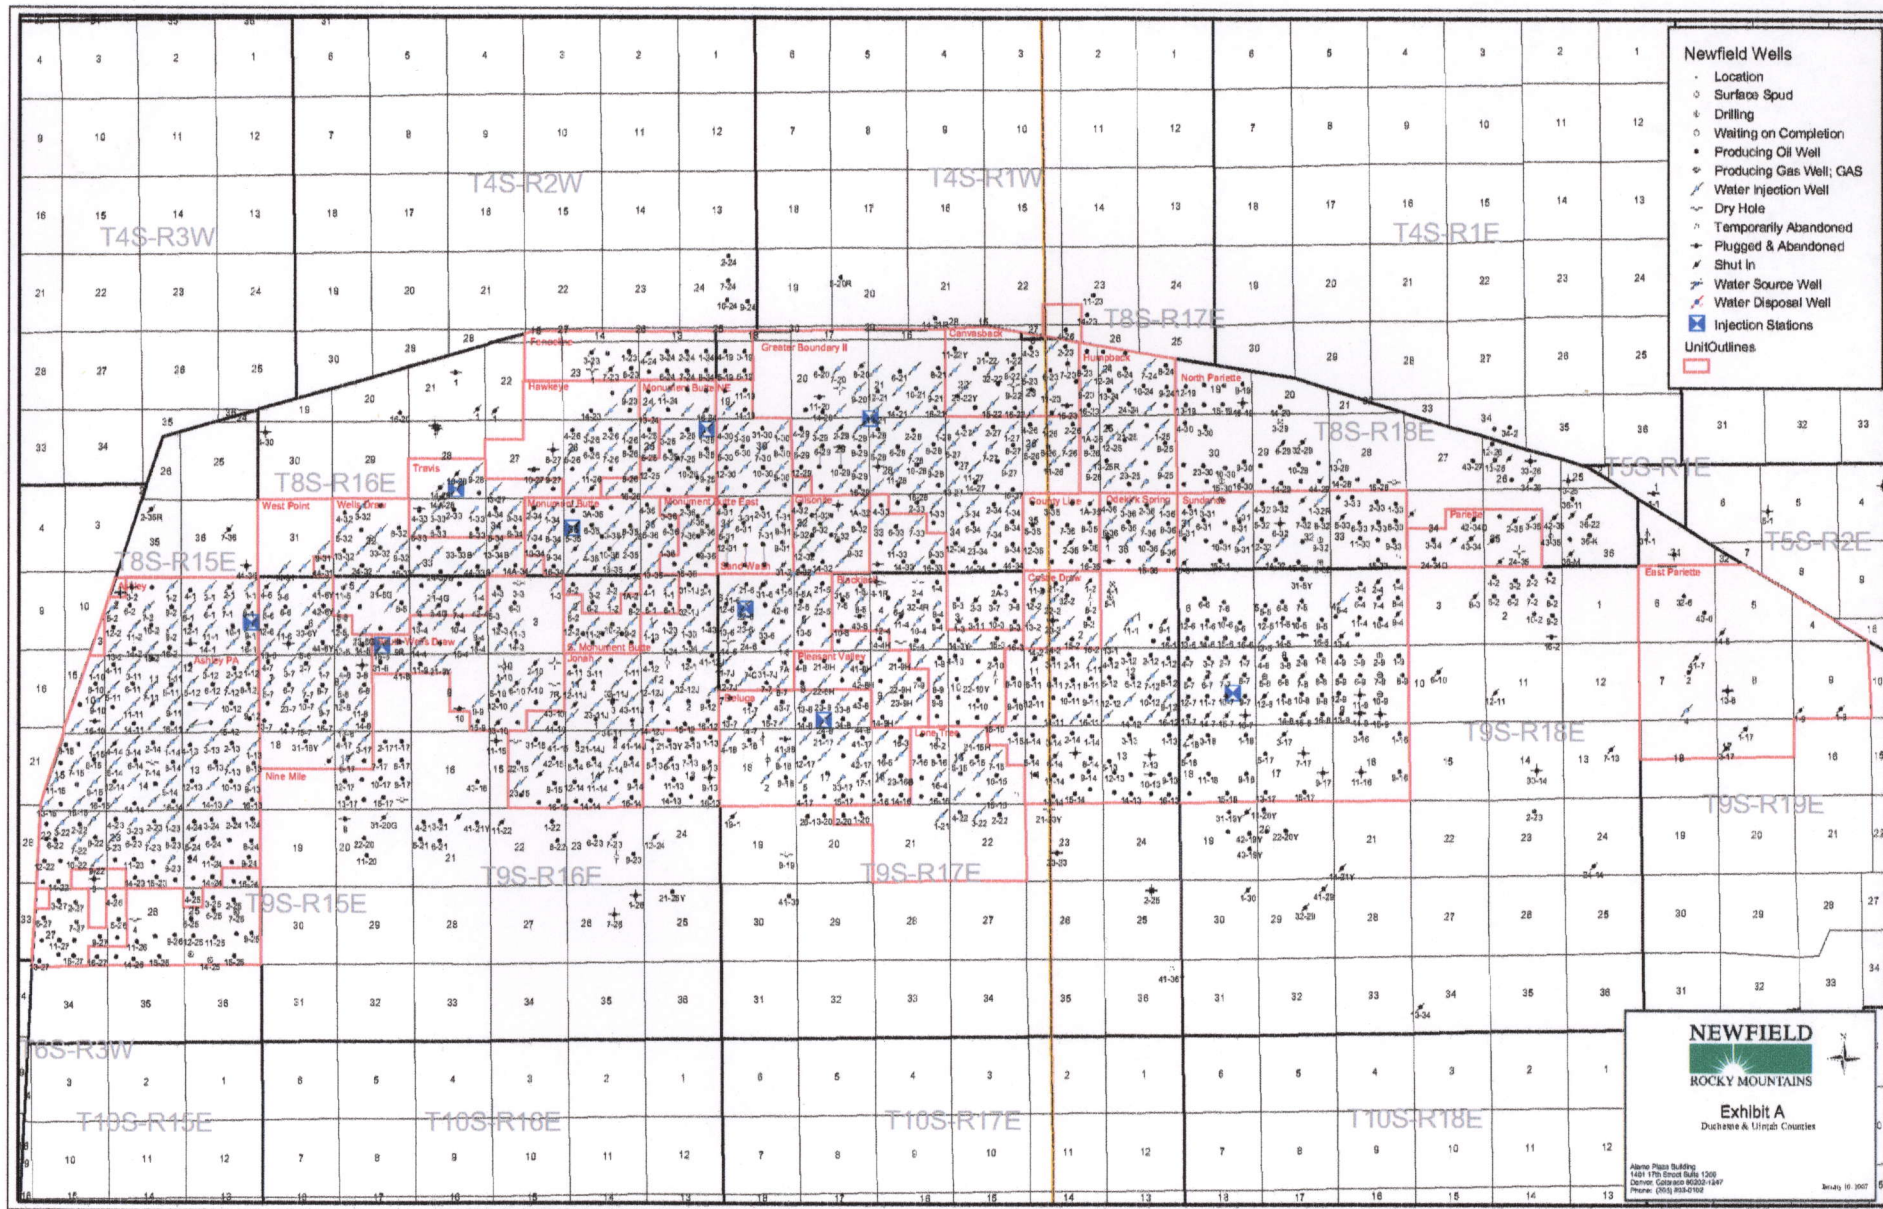



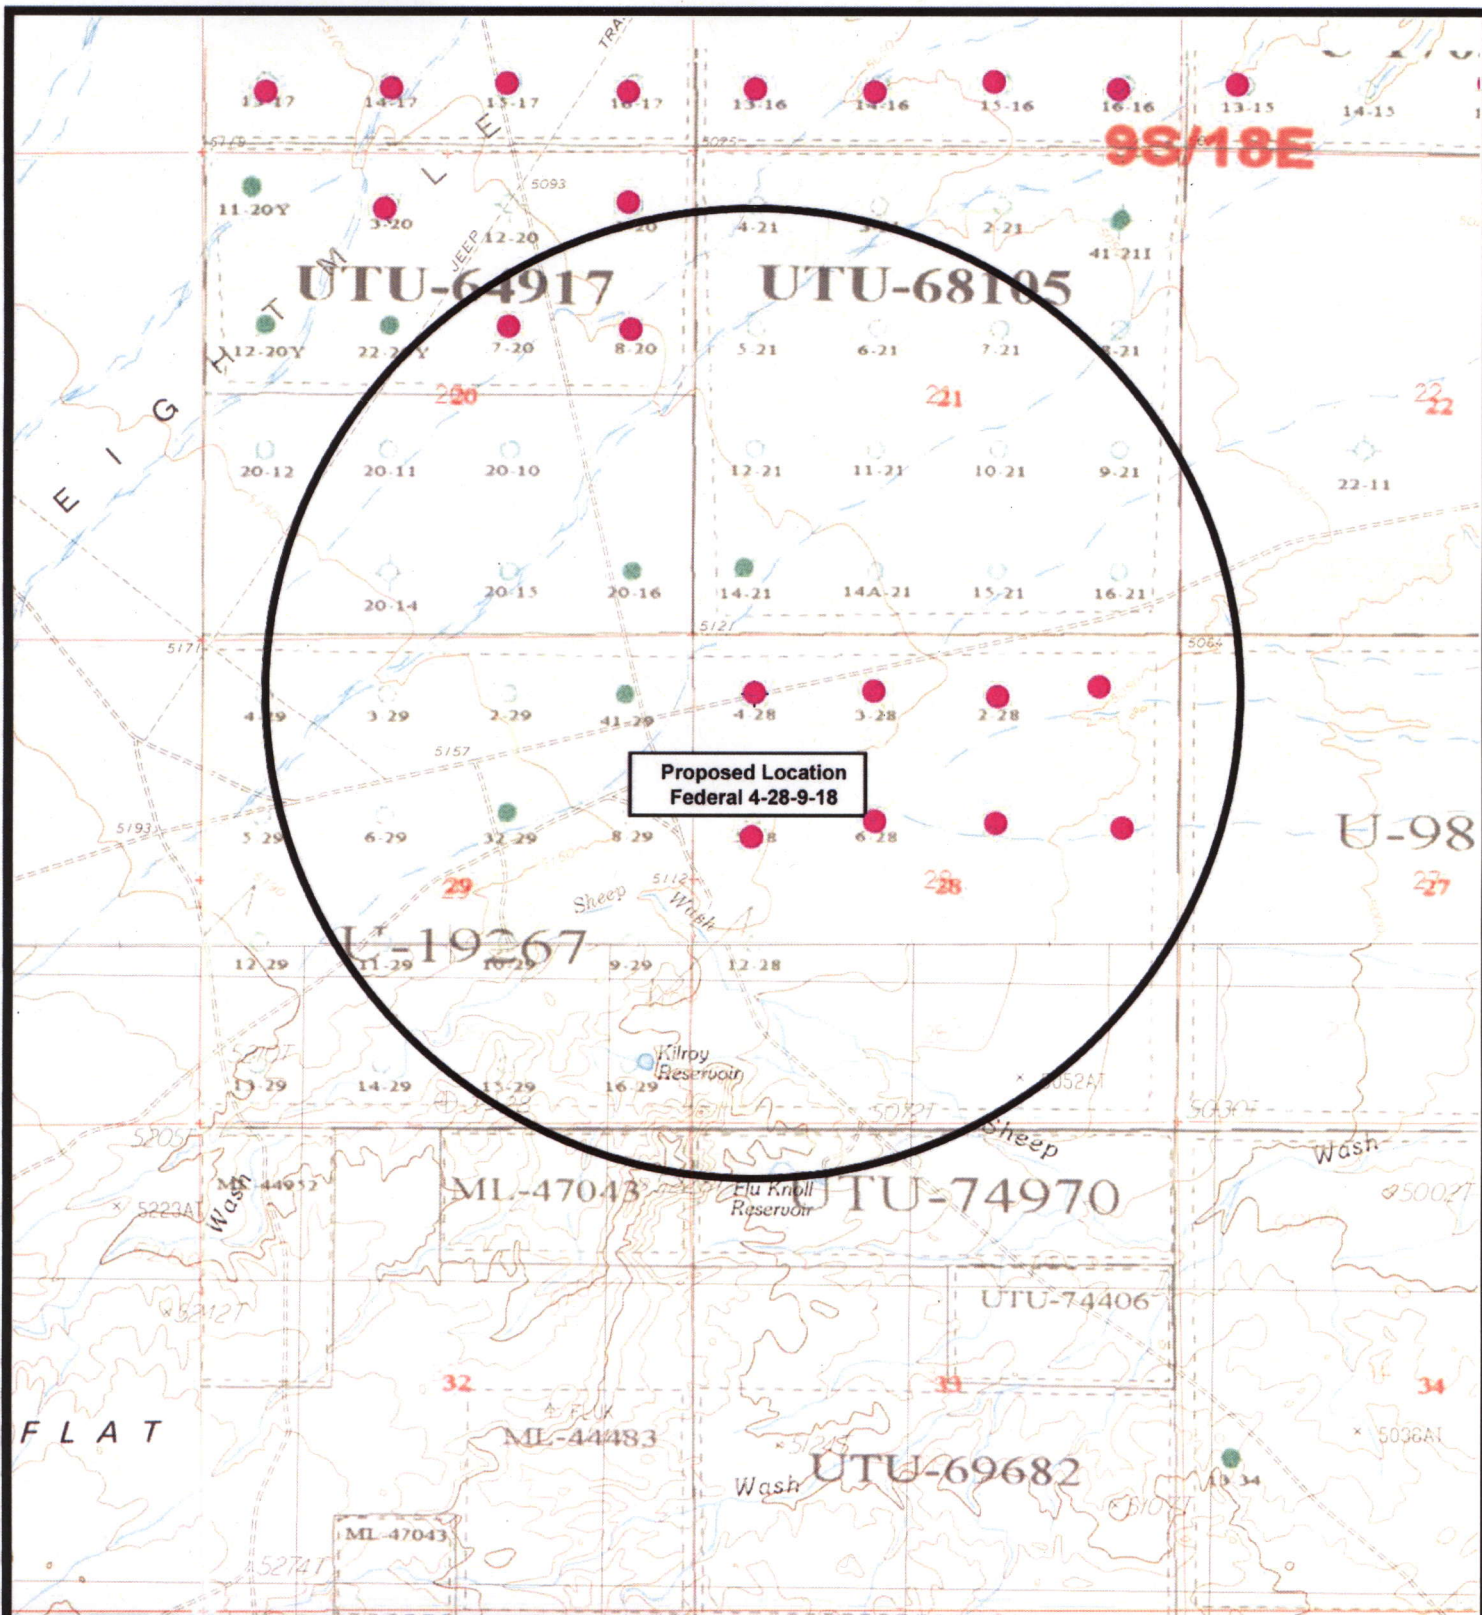




 <p><b>NEWFIELD</b> Exploration Company</p>		 <p><b>Tri-State</b> Land Surveying Inc. (435) 781-2501 180 North Vernal Ave. Vernal, Utah 84078</p>	<p><b>Legend</b></p>
<p><b>Federal 4-28-9-18</b> <b>SEC. 28, T9S, R18E, S.L.B.&amp;M.</b></p>		<p>SCALE: 1" = 2,000' DRAWN BY: nc DATE: 07-27-2007</p>	<p>● Pad Location ○ One-Mile Radius</p> <p><b>Exhibit "B"</b></p>



## Blowout Prevention Equipment Systems

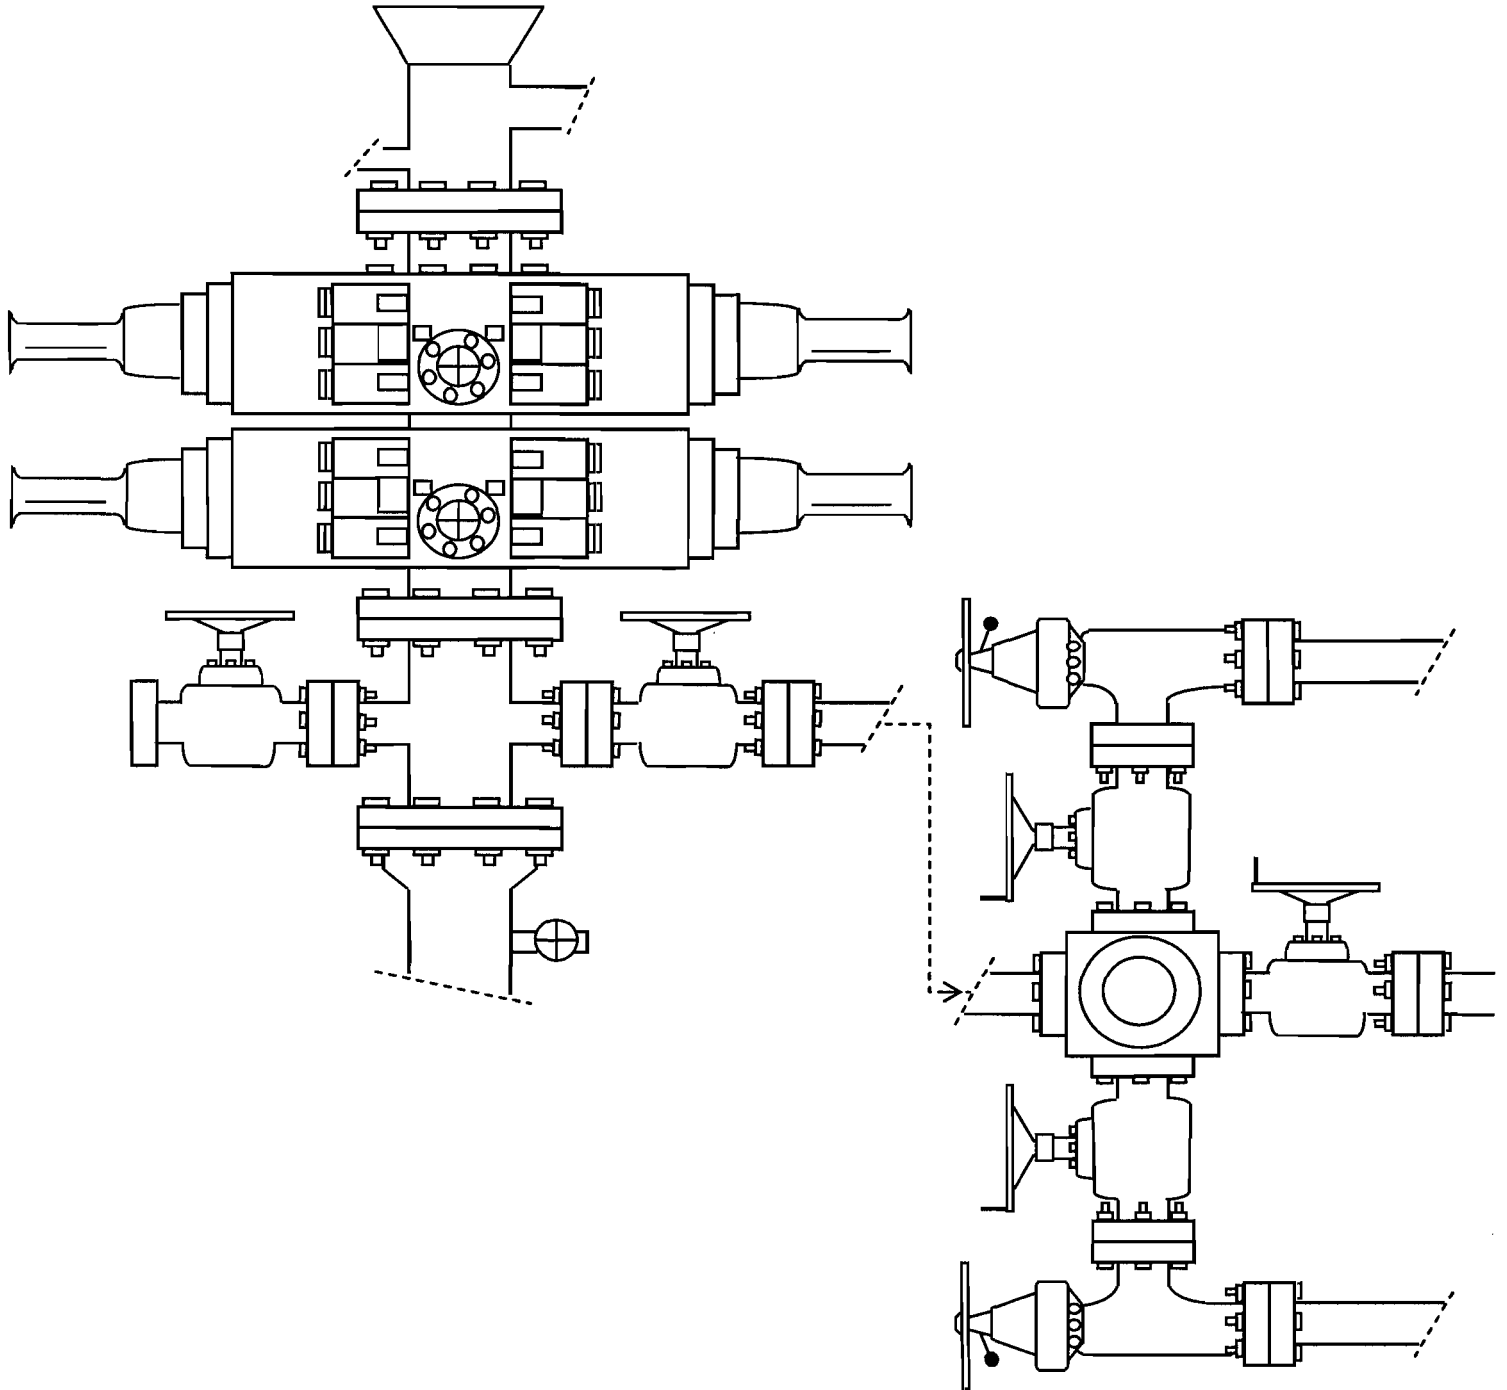

**EXHIBIT C**

Exhibit "D"

1 of 2

CULTURAL RESOURCE INVENTORY  
OF NEWFIELD EXPLORATION'S  
BLOCK PARCELS ON EIGHTMILE FLAT  
T9S, R18E, SECTIONS 28 AND 29  
UINTAH COUNTY, UTAH

By:

Jacki A. Montgomery

Prepared For:

Bureau of Land Management  
Vernal Field Office

Prepared Under Contract With:

Newfield Exploration Company  
Rt. 3 Box 3630  
Myton, UT 84052

Submitted By:

Montgomery Archaeological Consultants, Inc.  
P.O. Box 219  
Moab, Utah 84532

MOAC Report No. 07-315

September 19, 2007

United States Department of Interior (FLPMA)  
Permit No. 07-UT-60122

State of Utah Antiquities Project (Survey)  
Permit No. U-07-MQ-1158b

**NEWFIELD EXPLORATION COMPANY**

**PALEONTOLOGICAL FIELD SURVEY OF PROPOSED  
PRODUCTION DEVELOPMENT AREAS,  
UINTA COUNTY, UTAH**

**Horseshoe Bend Area**

SE 1/4, SW 1/4, Section 29, T 5 S, R 20 E (14-29-5-20)

**(Pipeline Survey)**

SE 1/4 & SW 1/4, SW 1/4, Section 29, T 5 S, R 20 E

**Southern Pariette Draw Area**

Entire Section 28 [excluding NW 1/4, NW 1/4] plus,  
NW 1/4, & SE 1/4, NE 1/4, Section 29, T 9 S, R 18 E

**REPORT OF SURVEY**

Prepared for:

**Newfield Exploration Company**

Prepared by:

Wade E. Miller  
Consulting Paleontologist  
September 1, 2007

**WORKSHEET**  
**APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 10/01/2007

API NO. ASSIGNED: 43-047-39672

WELL NAME: FEDERAL 4-28-9-18

OPERATOR: NEWFIELD PRODUCTION ( N2695 )

CONTACT: MANDIE CROZIER

PHONE NUMBER: 435-646-3721

PROPOSED LOCATION:

NWNW 28 090S 180E

SURFACE: 0838 FNL 0668 FWL

BOTTOM: 0838 FNL 0668 FWL

COUNTY: UINTAH

LATITUDE: 40.00690 LONGITUDE: -109.9049

UTM SURF EASTINGS: 593469 NORTHINGS: 4428887

FIELD NAME: 8 MILE FLAT NORTH ( 590 )

INSPECT LOCATN BY: / /

**Tech Review**

**Initials**

**Date**

Engineering

Geology

Surface

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-19267

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: GRRV

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat  
☒ Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. UTB000192 )  
☒ Potash (Y/N)  
☒ Oil Shale 190-5 (B) or 190-3 or 190-13  
☒ Water Permit  
(No. 43-10136 )  
☒ RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )  
☒ Fee Surf Agreement (Y/N)  
☒ Intent to Commingle (Y/N)

LOCATION AND SITING:

       R649-2-3.

Unit: \_\_\_\_\_

☒ R649-3-2. General

Siting: 460 From Qtr/Qtr & 920' Between Wells

       R649-3-3. Exception

       Drilling Unit

Board Cause No: \_\_\_\_\_

Eff Date: \_\_\_\_\_

Siting: \_\_\_\_\_

       R649-3-11. Directional Drill

COMMENTS: \_\_\_\_\_

STIPULATIONS: \_\_\_\_\_

*1- Federal Approval*  
*2- Special Strip*

20

21

22

KIDD FED  
20-10KIDD FED  
22-11  
NGC 23-22-1UTD KIDD  
20-15FEDERAL  
1-20-9-18  
UTD KIDD  
20-16 CMON FED  
14-21-9-18 Y

T9S R18E

FEDERAL  
1-29-9-18  
①FEDERAL  
11-29-9-18O.K. CORRAL  
4-28FEDERAL  
1-28-9-18  
①FEDERAL  
3-28-9-18  
①FEDERAL  
3-28-9-18  
①FEDERAL  
1-28-9-18  
①FEDERAL  
3-29-9-18  
①FEDERAL  
8-29-9-18  
①FEDERAL  
5-28-9-18  
①FEDERAL  
6-28-9-18  
①FEDERAL  
7-28-9-18  
①FEDERAL  
8-28-9-18  
①

29

28

27

NGC  
13-28-1

## EIGHT MILE FLAT NORTH FIELD

FEDERAL  
3-29-9-18  
①

32

31

34

OPERATOR: NEWFIELD PROD CO (N2693)

SEC: 28 T.9S R.18E

FIELD: EIGHT MILE FLAT NORTH (590)

COUNTY: UTAH

SPACING: R649-3-2 / GENERAL SITING

## Field Status

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

## Unit Status

- EXPLORATORY
- GAS STORAGE
- NE PP OIL
- NE SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

## Wells Status

- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING



OIL, GAS &amp; MINING



PREPARED BY: DIANA MASON  
DATE: 03-OCTOBER-2007



JON M. HUNTSMAN, JR.  
*Governor*

GARY R. HERBERT  
*Lieutenant Governor*

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
*Executive Director*

### Division of Oil Gas and Mining

JOHN R. BAZA  
*Division Director*

October 3, 2007

Newfield Production Company  
Rt. #3, Box 3630  
Myton, UT 84052

Re: Federal 4-28-9-18 Well, 838' FNL, 668' FWL, NW NW, Sec. 28, T. 9 South, R. 18 East,  
Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39672.

Sincerely,

Gil Hunt  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal Office

Operator: Newfield Production Company  
Well Name & Number Federal 4-28-9-18  
API Number: 43-047-39672  
Lease: UTU-19267  
Location: NW NW Sec. 28 T. 9 South R. 18 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER



FORM APPROVED  
OMB No. 1004-0136  
Expires January 31, 2004

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-19267
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name N/A
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. N/A
3a. Address Route #3 Box 3630, Myton UT 84052	3b. Phone No. (include area code) (435) 646-3721	8. Lease Name and Well No. Federal 4-28-9-18
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NW/NW 838' FNL 668' FWL At proposed prod. zone		9. API Well No. 43 047 391672
14. Distance in miles and direction from nearest town or post office* Approximatley 20.9 miles southeast of Myton, Utah		10. Field and Pool, or Exploratory Sheepwash
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 838' f/lse, NA' f/unit		11. Sec., T., R., M., or Blk. and Survey or Area NW/NW Sec. 28, T9S R18E
16. No. of Acres in lease 1,918.84		12. County or Parish Uintah
17. Spacing Unit dedicated to this well 40 Acres		13. State UT
18. Distance from proposed* location to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1492'		20. BLM/BIA Bond No. on file UTB000192
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5128' GL		22. Approximate date work will start* 1st Quarter 2008
		23. Estimated duration Approximately seven (7) days from spud to rig release.

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- |   |  |
|---|--|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).    |
| 2. A Drilling Plan.   | 5. Operator certification.   |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) Mandie Crozier	Date 9/28/07
Title Regulatory Specialist		
Approved by (Signature) 	Name (Printed/Typed) Jenny Kewelsa	Date 6-5-2008
Title Assistant Field Manager Lands & Mineral Resources		
Office VERNAL FIELD OFFICE		

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

**CONDITIONS OF APPROVAL ATTACHED**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

UDOGM

NOTICE OF APPROVAL

RECEIVED


JUN 09 2008

DIV. OF OIL, GAS & MINING

01 PP2760A

NOS: 9/14/07





UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL**

Company: Newfield Production Company  
Well No: Federal 4-28-9-18  
API No: 43-047-39672

Location: NWNW, Sec. 28, T9S, R18E  
Lease No: UTU-19267  
Agreement: N/A

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	James Ashley	(435) 781-4470	(435) 828-7874
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
NRS/Enviro Scientist:		(435) 781-4475	(435) 828-4029
Supervisory NRS/Enviro Scientist:	Karl Wright	(435) 781-4484	(435) 828-7381
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544
NRS/Enviro Scientist:		(435) 781-4476	
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7482
NRS/Enviro Scientist:		(435) 781-3400	(435) 828-3544
NRS/Enviro Scientist:	Michael Cutler	(435) 781-3401	(435) 828-3546
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Darren Williams	(435) 781-4447	(435) 828-4029
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545

Fax: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR  
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

**NOTIFICATION REQUIREMENTS**

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)***

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

**STIPULATIONS:**

1. The proposed area contains Mountain plover habitat. With this occurrence there will be a timing restriction during project activity (construction and drilling) to minimize disturbance during Mountain plover nesting from May – June 15.
2. An active colony of prairie dogs and their burrows (burrowing owl habitat) were observed on and around the proposed site. With this occurrence there will be a timing restriction during project activity (construction and drilling) to minimize disturbance during Burrowing owl nesting from April – July 15.

**Lease Notices from RMP:** None

**Comments:**

1. If it is anticipated that construction or drilling will occur during the given timing restrictions for any wildlife, a BLM or qualified biologist shall be notified so surveys can be conducted. Depending upon the results of the survey, permission to proceed may or may not be recommended or granted (depending on the species being surveyed and the condition of the habitat).

**Follow-up Actions and/or Recommendations:**

**Please be aware that this Special Status Species wildlife clearance is effective for 1 year from the date of the onsite date. Any proposals submitted after the date of this report (onsite) shall require additional surveys and clearances.**

**CONDITIONS OF APPROVAL:**

- All traffic related to this action will be restricted to approved routes. Cross-country vehicle travel will not be allowed.
- All pipelines (surface and buried) will be laid within one 50' wide construction ROW, on one side of the road, and will reduce down to a 30' wide permanent ROW on lease.

- A temporary road ROW will not be granted. The road ROW will be 30 foot for construction and will reduce to an 18 foot running surface.
- The access road will be crowned and ditched. Flat-bladed roads are not allowed. All roads will have an 18', crowned (2 to 3% minimum), running surface. All roads will have drainage ditches along both sides of road.
- No vehicle travel, construction or routine maintenance activities shall be performed during periods when the soil is too wet to adequately support vehicles and/or construction equipment. If such equipment creates ruts in excess of three inches deep, the soil shall be deemed too wet to adequately support construction equipment.
- If additional erosion occurs during the life of this project, more culverts, low water crossings, berms, wing ditches or etc. will be needed to control the erosion.
- Low-water crossings will be appropriately constructed to avoid sedimentation of drainage ways and other water resources.
- Pipelines will be buried at all major drainage crossings.
- Prevent fill and stock piles from entering drainages.
- To insure impermeability, the reserve pit will be lined with a 16 ml or greater liner and felt prior to spudding.
- The liner is to be cut 5 feet below ground surface or at the level of the cuttings, whichever is deeper, and the excess liner material is to be disposed of at an authorized disposal site.
- When the reserve pit contains fluids or toxic substances, the operator must ensure animals do not ingest or become entrapped in pit fluids.
- Any hydrocarbons in the reserve pit will be removed **immediately** upon well completion; in accordance with 43 CFR 3162.7-1. Pits must be free of oil and other liquid and solid wastes prior to filling.
- Monument Butte SOP, Section 9.2 - Pit Fencing Minimum Standards - will be strictly adhered to. To include 9.2.2.3 - Corner posts will be cemented and/or braced in such a manner as to keep fence tight at all times.
- If Uinta Basin hookless cactus or other special status plants are found, construction will cease and the AO will be notified to determine the appropriate mitigation.
- **Within 90 calendar days of the approval date for this Application for Permit to Drill (APD), the operator/lessee shall submit to the Authorized Officer (AO), on Sundry Notice Form 3160-5, an Interim/Final Surface Reclamation Plan for surface disturbance on well**

pads, access roads, and pipelines. At a minimum, this will include the reshaping of the pad to the original contour to the extent possible; the re-spreading of the top soil up to the rig anchor points; and, the area reseeded using appropriate reclamation methods. The AO will provide written approval or concurrence within 30 calendar days of receipt.

- **Interim Reclamation:**

The topsoil from the reserve pit shall be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be **seeded using a rangeland drill**. Seeding depth as per AO, or seed distributor. If portions of the site are too steep (>40%), or rocky, that portion may be broadcast seeded. If broadcasting seed, the seed shall be walked into the soil with a dozer immediately after the seeding is completed, or covered by soil using a drag chain. Seeding shall occur in the fall (August 1<sup>st</sup> until snow or ground is frozen) with the following seed mix:

Seed mix:

Common name	Latin name	lbs/acre	Recommended seed planting depth
Squirreltail grass	<i>Elymus elymoides</i>	3.0	1/4 - 1/2"
Siberian wheatgrass	<i>Agropyron fragile</i>	1.0	1/2"
Shadscale saltbush	<i>Atriplex confertifolia</i>	0.50	1/2"
Four-wing saltbush	<i>Atriplex canescens</i>	0.50	1/2"
Gardner's saltbush	<i>Atriplex gardneri</i>	0.50	1/2"
Scarlet globemallow	<i>Sphaeralcea coccinea</i>	0.10	1/8 - 1/4"

- All pounds are pure live seed.
- All seed and mulch will be certified weed free.
- Rates are set for drill seeding; double rate if broadcasting.
- Reseeding may be required if initial seeding is not successful.

- **Final reclamation:**

Once the location is plugged and abandoned, the well location, access, and any disturbed areas shall be recontoured to natural topography, topsoil shall be respread, and the entire location shall be seeded following guidelines in the seed mix bullet statement above. Final seed mix: same as interim.

- Noxious and/or invasive weeds will be controlled along access roads, pipelines, well sites, and all other applicable facilities. Any noxious and/or invasive weeds outbreak, directly attributed to the activities of the Operator, will be the responsibility of the Operator to control. On BLM administered land, a Pesticide Use Proposal (PUP) must be submitted and approved prior to the application of herbicides, pesticides, or other possibly hazardous chemicals.

- The topsoil from the reserve pit shall be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be re-contoured and the topsoil re-spread, and the area shall be seeded in the same manner as the location topsoil.
- Once the location is plugged and abandoned, it shall be re-contoured to natural topology, topsoil shall be re-spread, and the entire location shall be seeded with a seed mix recommended by the AO (see above). Seed application will follow all guidelines in the interim seed mix bullet statement above. If reclamation seeding should take place using the broadcast method, the seed at a minimum will be walked into the soil with a dozer immediately after the seeding is completed.
- The authorized officer may prohibit surface disturbing activities during severe winter conditions to minimize watershed damage. This limitation does not apply to operation and maintenance of producing wells.
- The authorized officer may prohibit surface disturbing activities during wet or muddy conditions to minimize watershed damage. This limitation does not apply to operation and maintenance of producing wells.
- All well facilities not regulated by OSHA will be painted Carlsbad Canyon.
- All boulders with a length or diameter greater than 3 feet, that are found showing at the surface, will be stockpiled for use during final reclamation.
- Notify the Authorized Officer 48 hours prior to surface disturbing activities.

***DOWNHOLE PROGRAM  
CONDITIONS OF APPROVAL (COAs)***

**SITE SPECIFIC DOWNHOLE COAs:**

- None

**All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to.** The following items are emphasized:

**DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS**

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.

- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT\_VN\_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

## **OPERATING REQUIREMENT REMINDERS:**

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
  - Operator name, address, and telephone number.
  - Well name and number.
  - Well location (¼¼, Sec., Twn, Rng, and P.M.).
  - Date well was placed in a producing status (date of first production for which royalty will be paid).
  - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
  - Unit agreement and/or participating area name and number, if applicable.
  - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.



- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.

- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry a different reservoir.  
Use "APPLICATION FOR PERMIT -" for such proposals

5. Lease Designation and Serial No.

**UTU-19267**

6. If Indian, Allottee or Tribe Name

**NA**

7. If Unit or CA, Agreement Designation

**NA**

8. Well Name and No.

**FEDERAL 4-28-9-18**

9. API Well No.

**43-047-39672**

10. Field and Pool, or Exploratory Area

**SHEEPWASH**

11. County or Parish, State

**UINTAH COUNTY, UT.**

**SUBMIT IN TRIPLICATE**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

**NEWFIELD PRODUCTION COMPANY**

3. Address and Telephone No.

**Rt. 3 Box 3630, Myton Utah, 84052 435-646-3721**

4. Location of Well (Footage, Sec., T., R., m., or Survey Description)

**838 FNL 668 FWL NW/NW Section 28, T9S R18E**

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

**TYPE OF SUBMISSION**

☒ Notice of Intent  
☐ Subsequent Report  
☐ Final Abandonment Notice

**TYPE OF ACTION**

☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other **Permit Extension**

☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Newfield Production Company requests to extend the Permit to Drill this well for one year.

Approved by the  
Utah Division of  
Oil, Gas and Mining

Date: 09-30-08

By: [Signature]

COPY SENT TO OPERATOR

Date: 10.2.2008

Initials: KS

**RECEIVED**

**SEP 29 2008**

**DIV. OF OIL, GAS & MINING**

14. I hereby certify that the foregoing is true and correct.

Signed

[Signature]  
Mandie Crozier

Title

Regulatory Specialist

Date

9/26/2008

CC: UTAH DOGM

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any:

CC: Utah DOGM

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RESET

**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 43-047-39672  
**Well Name:** Federal 4-28-9-18  
**Location:** NW/NW Section 28, T9S R18E  
**Company Permit Issued to:** Newfield Production Company  
**Date Original Permit Issued:** 10/3/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

  
Signature

9/26/2008

Date

Title: Regulatory Specialist

Representing: Newfield Production Company

RECEIVED  
SEP 29 2008  
DIV. OF OIL, GAS & MINING

Spud  
BLM - Vernal Field Office - Notification Form

Operator NewfieldExploration Rig  
Name/# Ross # 24 Submitted By Justin Crum Phone Number  
823-6733  
Well Name/Number Federal 4-28-9-18  
Qtr/Qtr NW/NW Section 28 Township 9s Range 18e  
Lease Serial Number UTU-19267  
API Number 43-047-39672

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 11/10/08 10:30 AM ☒ PM ☐

Casing – Please report time casing run starts, not cementing times.

- ☒ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

Date/Time 11/11/08 9:00 AM ☒ PM ☐

BOPE

- ☐ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

Date/Time \_\_\_\_\_ AM ☐ PM ☐

Remarks \_\_\_\_\_

STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING  
ENTITY ACTION FORM - FORM 6

OPERATOR: **NEWFIELD PRODUCTION COMPANY**  
ADDRESS: **RT. 3 BOX 3630**  
**MYTON, UT 84062**

OPERATOR ACCT. NO. **N2695**

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION				COUNTY	SPUD DATE	EFFECTIVE DATE
					Q2	SC	TP	RG			
A	99999	17211	4301333996	FEDERAL 10-20-8-16	NWSE	20	8S	16E	DUCHESNE	11/7/2008	11/25/08
WELL 1 COMMENTS: GRRV											
B	99999	12391	4301333736	GREATER BOUNDARY FEDERAL 2-19-8-17	NWNE	19	8S	17E	DUCHESNE	11/7/2008	11/25/08
GRRV											
A	99999	17212	4301333993	FEDERAL 12-20-8-16	NWSW	20	8S	16E	DUCHESNE	11/1/2008	11/25/08
GRRV											
A	99999	17213	4304739672	FEDERAL 4-28-9-18	NWNW	28	9S	18E	UINTAH	11/8/2008	11/25/08
GRRV											
B	99999	11492	4301334011	JONAH FEDERAL N-14-9-16	NWSW	14	9S	16E	DUCHESNE	11/10/2008	11/25/08
WELL 5 COMMENTS: GRRV BHL = NESW											
B	99999	12391	4301333735	GREATER BOUNDARY FEDERAL 7-19-8-17	SWNE	19	8S	17E	DUCHESNE	11/10/2008	11/25/08
WELL 5 COMMENTS: GRRV											

ACTION CODES (See instructions on back of form)


- A - 1 new entity for new well (single well only)
- B - well to existing entity (group or well well)
- C - from one existing entity to another existing entity
- D - well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED

NOV 13 2008

DIV. OF OIL, GAS & MINING

Signature   
Jenri park  
Production Clerk  
11/13/08  
Date

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUBMIT IN TRIPLICATE - Other Instructions on page 2**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

3a. Address

Route 3 Box 3630  
Myton, UT 84052

3b. Phone (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

838 FNL 668 FWL

NWNW Section 28 T9S R18E

5. Lease Serial No.

UTU-19267

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

8. Well Name and No.

DNU- OK CORRAL 4-28-9-18

9. API Well No.

4304739672

10. Field and Pool, or Exploratory Area

MONUMENT BUTTE

11. County or Parish, State

UINTAH, UT

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomple in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 10 Nov 2008 MIRU Ross # 24. Drill 315' of 12 1/4" hole with air mist to 327' KB (KB elevation = 12'). TIH W/ 8-5/8- guide shoe, 1 Jt 8-5/8" J-55 24#/ft casing (shoe jt), baffle plate, and 7 Jt's 8 5/8" J-55 24 # csgn. Set @ 316.85' KB. On 12 Nov 2008 cemented with 160 sks of class "G" w/ 2% CaCL2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg & 1.17 cf/sk yield. Returned 6 bbls cement to pit. WOC.

I hereby certify that the foregoing is true and correct (Printed/ Typed)

Sean Stevens

Signature

Title

Field Engineer

Date

11/18/2008

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

RECEIVED

DEC 01 2008

DIV. OF OIL, GAS & MINING

8-5/8" CASING SET AT 315.85

OPERATOR Newfield Exploration Company  
WELL FEDERAL 4-28-9-18  
FIELD/PROSPECT Monument Butte  
CONTRACTOR & RIG # Ross#24

[illegible]

COMPANY REPRESENTATIVE      **Sean Stevens**      DATE    **11/18/2008**



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUBMIT IN TRIPLICATE - Other Instructions on page 2**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

3a. Address

Route 3 Box 3630  
Myton, UT 84052

3b. Phone (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

838 FNL 668 FWL

NWNW Section 28 T9S R18E

5. Lease Serial No.

UTU-19267

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

8. Well Name and No.

DNU- OK CORRAL 4-28-9-18

9. API Well No.

4304739672

10. Field and Pool, or Exploratory Area

MONUMENT BUTTE

11. County or Parish, State

UINTAH, UT

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Weekly Status Report
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 18 Nov 08 MIRU NDSI Rig #3. Set all equipment. Pressure test Kelly, TIW, Choke manifold, & BOP's to 2,000 psi. Test 8-5/8" csgn to 1,500 psi. Vernal BLM field, & Roosevelt DOGM office was notified of test. Pick up BHA and tag cement @ 275'. Drill out cement & shoe. Drill a 7-7/8" hole with fresh water to a measured depth of 5440'. Lay down drill string & BHA. Ran a single pass open hole triple combo log from TD to surface. Pick up & trip in hole with guide shoe, shoe jt, float collar, 135 jt's of 5-1/2" J-55, 15.5# casing. Set @ 5427.64' KB. Cemented with a lead cement of 215 sks mixed @ 11.0 ppg & 3.49 yld followed by a tail cement of 365 sks mixed @ 14.4 ppg & 1.24 yld. Returned 10 bbl cmt to surface. Nipple down BOP's. Set slips @ 110,000 #'s tension. Release rig @ 10:00 PM on 22 Nov 08.

I hereby certify that the foregoing is true and correct (Printed/ Typed)

Sean Stevens

Signature

Title

Petroleum Engineer

Date

11/23/2008

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

**RECEIVED**

DEC 01 2008

DIV. OF OIL, GAS & MINING

# NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

5 1/2" CASING SET AT 5426.28

LAST CASING 8 5/8" SET AT 315.85  
 DATUM 12  
 DATUM TO CUT OFF CASING 10  
 DATUM TO BRADENHEAD FLANGE 12  
 TD DRILLER 5440 LOGG 5447  
 HOLE SIZE 5 1/2"

OPERATOR Newfield Exploration Company  
 WELL FEDERAL 4-28-9-18  
 FIELD/PROSPECT Monument Butte  
 CONTRACTOR & RIG # NDSI#3

## LOG OF CASING STRING:

PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
1	5 1/2"	Landing Jt	15.5	J-55	LTC	New	14
135	5 1/2"	Production Casing	15.5	J-55	LTC	New	5398.03
1	5 1/2"	Float Collar				New	1.74
1	5 1/2"	Shoe Jt	15.5	J-55	LTC	New	15
1	5 1/2"	Guide Shoe				New	0.87

CASING INVENTORY BAL.	FEET	JTS	TOTAL LENGTH OF STRING	5429.64
TOTAL LENGTH OF STRING	5429.64		LESS CUT OFF PIECE	14
LESS NON CSG. ITEMS	16.61	0	PLUS DATUM TO T/CUT OFF CSG	12
PLUS FULL JTS. LEFT OUT	200.72	5	CASING SET DEPTH	<b>5,427.64</b>
TOTAL	5613.75	5	} COMPARE	
TOTAL CSG. DEL. (W/O THRDS)	5613.75	141		
TIMING				
BEGIN RUN CSG.	Spud	9:00 AM	11/22/2008	GOOD CIRC THRU JOB <u>Yes</u>
CSG. IN HOLE		12:00 PM	11/22/2008	Bbls CMT CIRC TO SURFACE <u>10</u>
BEGIN CIRC		1:57 PM	11/22/2008	RECIPROCATED PIPE <u>No</u>
BEGIN PUMP CMT		2:09 PM	11/22/2008	BUMPED PLUG TO <u>2074</u>
BEGIN DSPL. CMT		2:50 PM	11/22/2008	
PLUG DOWN		3:10 PM	11/22/2008	

[illegible]

COMPANY REPRESENTATIVE

DATE **11/23/2008**

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:  
UTU-19267

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL:

OIL WELL ☒ GAS WELL ☐ OTHER

2. NAME OF OPERATOR:

NEWFIELD PRODUCTION COMPANY

3. ADDRESS OF OPERATOR:

Route 3 Box 3630 CITY Myton STATE UT ZIP 84052

PHONE NUMBER

435.646.3721

4. LOCATION OF WELL:

FOOTAGES AT SURFACE: 838 FNL 668 FWL

8. WELL NAME and NUMBER:

FEDERAL 4-28-9-18

9. API NUMBER:

4304739672

10. FIELD AND POOL, OR WILDCAT:

MONUMENT BUTTE

COUNTY: UINTAH

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NWNW, 28, T9S, R18E

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate)  Approximate date work will  	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/STOP) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLAIR <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: - Weekly Status Report
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only)  Date of Work Completion:  01/30/2009			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above subject well was completed on 12/18/08, attached is a daily completion status report.

NAME (PLEASE PRINT) Jentri Park

TITLE Production Clerk

SIGNATURE

DATE 01/30/2009

(This space for State use only)

RECEIVED

FEB 02 2009

DIV. OF OIL, GAS & MINING

**Daily Activity Report**

Format For Sundry

**FEDERAL 4-28-9-18****10/1/2008 To 2/28/2009****12/10/2008 Day: 1****Completion**

Rigless on 12/9/2008 - Instal 5K frac head. NU 6" 5K Cameron BOP. RU H/O truck & pressure test casing, blind rams, frac head, csg & casing valves to 4500 psi. RU Perforators LLC WLT w/ mast & run CBL under pressure. WLTD @ 5380' & cement top @ 318'. Perforate stage #1, CP2 sds @ 5020-28', CP1 sds @ 4983-94' w/ 3-1/8" Slick Guns (19 gram, .49" HE. 120°) w/ 4 spf for total of 76 shots. 129 bbls EWTR. SIFN.

**12/13/2008 Day: 2****Completion**

Rigless on 12/12/2008 - Stage #1, CP2 & CP1 sands. RU BJ Services. 0 psi on well. Frac CP2 & CP1 w/ 64,834#'s of 20/40 sand in 545 bbls of Lightning 17 fluid. Broke @ 2991 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 1984 psi @ ave rate of 23.2 BPM. Pumped 504 gals of 15% HCL in flush for Stage #2. ISIP 2294 psi. Leave pressure on well. RU PSI WLT, crane & lubricator. RIH w/ Weatherford 5-1/2" 5K composite flow through frac plug, 8', 18' & 6' perf gun, set plug @ 4750'. Perforate A3, A1, A.5 sds @ 4664-72', 4624-42' & 4560-66' w/ 3 1/8" slick guns (19 gram, .40" HE, 120°, 38.87" pen, EXP-3319-332T Titan) w/ 4 spf for total of 128 shots (2-runs). 674 BWTR Stage #1, A3, A1, A.5 sands. RU BJ Services. 1640 psi on well. Frac A3, A1, A.5 w/ 83,269#'s of 20/40 sand in 645 bbls of Lightning 17 fluid. Broke @ 1770 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 1420 psi @ ave rate of 23.1 BPM. ISIP 1745 psi. 1319 BWTR. Flow well back immediately beginning w/ 28/64" choke @ 3 BPM until dead. Flowed for 2 1/2 hours, recovered 360 bbls. SWIFN.

**12/16/2008 Day: 3****Completion**

Leed #731 on 12/16/2008 - Road rig to location. Thaw BOPs & wellhead. RU rig. Blow down well, 50#. ND frac BOPs & frac head. NU production wellhead & BOPs. RU rig floor. X-over for tbg. SWIFN.

**12/17/2008 Day: 4****Completion**

Leed #731 on 12/16/2008 - Thaw BOPs & wellhead. Check pressure on well, 50 psi. Bleed off pressure. MU 4 3/4" chomp bit & bit sub. Talley & PU 154- jts 2 7/8" J-55 tbg. Tag plug @ 4750'. RU power swivel. Drill up plug in 35 min. PU 14- jts tbg & tag sand @ 5180'. Clean out to PBTD @ 5411'. Circulate well clean. RU power swivel. LD 3- jts tbg. RU swab equip. Made 1- swab w/ SFL @ 300'. Recovered 22 bbls. SWIFN. Drain pump & pump lines.

**12/18/2008 Day: 5****Completion**

Leed #731 on 12/17/2008 - Check pressure on well, 0 psi. RU swab equip. Made 9- swab runs w/ SFL @ 600' & EFL @ 1800'. Recovered total of 130 bbls ending w/ trace of oil, gas & sand. RD swab equip. TIH & tag fill @ 5407', clean out to PBTD @ 5411'. Circulate well clean. LD 14- jts tbg. TOH w/ 165- jts 2 7/8" J-55 tbg, bit sub & bit. MU & TIH w/ production tbg as follows: 2 7/8" NC, 2- jts 2 7/8" J-55 tbg, SN, 2- jts 2 7/8" tbg, TA, 161- jts 2 7/8" J-55 tbg. Set TA @ 4977' w/ 15,000# tension. ND BOPs. NU wellhead. Flush tbg w/ 60 BW. X-over for rods. SDFN.

**12/19/2008 Day: 6****Completion**

Leed #731 on 12/18/2008 - RIH w/ CDI 2 1/2" x 1 1/2" x 14' x 18' RHAC rod pump, 6- 1 1/2" weight bars, 20- 3/4" guided rods, 74- 3/4" slick rods, 100- 3/4" guided rods, 1- 3/4" slick rod, 1- 4' x 3/4" pony sub, 1 1/2" x 26' polished rod. Seat pump. Fill tbg. w/ 8 bbls water. Stroke test to 800 psi w/ rig. Good pump action. RU pumping unit. Hang off rods. RD. Put well on production @ 2:00 p.m. 5 spm, 102" stroke length. Final Report.

---

**Pertinent Files: Go to File List**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0137  
Expires: July 31, 2010

**WELL COMPLETION OR RECOMPLETION REPORT AND LOG**

1a. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Dry <input type="checkbox"/> Other b. Type of Completion: <input checked="" type="checkbox"/> New Well <input type="checkbox"/> Work Over <input type="checkbox"/> Deepen <input type="checkbox"/> Plug Back <input type="checkbox"/> Diff. Resrv., Other: _____						5. Lease Serial No. <b>UTU-19267</b>			
2. Name of Operator <b>NEWFIELD EXPLORATION COMPANY</b>						6. If Indian, Allottee or Tribe Name <b>NA</b>			
3. Address <b>1401 17TH ST. SUITE 1000 DENVER, CO 80202</b>						7. Unit or CA Agreement Name and No. <b>FEDERAL</b>			
3a. Phone No. (include area code) <b>(435)646-3721</b>						8. Lease Name and Well No. <b>FEDERAL 4-28-9-18</b>			
4. Location of Well (Report location clearly and in accordance with Federal requirements)*  At surface <b>838' FNL &amp; 668' FWL (NW/NW) SEC. 28, T9S, R18E</b>  At top prod. interval reported below  At total depth <b>6321'</b>						9. AFI Well No. <b>43-047-39672</b>			
10. Field and Pool or Exploratory <b>MONUMENT BUTTE</b>						11. Sec., T., R., M., on Block and Survey or Area <b>SEC. 28, T9S, R18E</b>			
12. County or Parish <b>UINTAH</b>						13. State <b>UT</b>			
14. Date Spudded <b>11/10/2008</b>		15. Date T.D. Reached <b>11/21/2008</b>		16. Date Completed <b>12/18/2008</b> <input type="checkbox"/> D & A <input checked="" type="checkbox"/> Ready to Prod.		17. Elevations (DF, RKB, RT, GL)* <b>5128' GL 5140' KB</b>			
18. Total Depth: MD <b>6321'</b> TVD <b>6195'</b>		19. Plug Back T.D.: MD <b>6291'</b> TVD		20. Depth Bridge Plug Set: MD TVD					
21. Type Electric & Other Mechanical Logs Run (Submit copy of each) <b>DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND</b>						22. Was well cored? <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (Submit analysis) Was DST run? <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (Submit report) Directional Survey? <input type="checkbox"/> No <input type="checkbox"/> Yes (Submit copy)			
23. Casing and Liner Record (Report all strings set in well)									
Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#		316'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#		5426'		215 PRIMLITE		318'	
						365 50/50 POZ			
24. Tubing Record									
Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	
2-7/8"	EOT@ 5106'	TA @ 4977'							
25. Producing Intervals									
Formation		Top		Bottom		26. Perforation Record <b>4510'</b>			
A) GREEN RIVER						Perforated Interval	Size	No. Holes	Perf. Status
						(CP2)5020-28(CP1)4983-9'	.49"	4	76
B) GREEN RIVER						(A3)(A1)(A.5) see below	.49"	4	128 (2 RUNS)
C)									
D)									
27. Acid, Fracture, Treatment, Cement Squeeze, etc.									
Depth Interval		Amount and Type of Material							
4983-5028'		Frac w/ 64834# of 20/40 snd 545 bbls fluid							
4560-4672'		Frac w/ 83269# 20/40 snd 645 bbls fluid							
28. Production - Interval A									
Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
12/18/08	12/30/08	24	→	31	23	65			1-1/2" x 1-1/2" x 14' x 18' RHAC Rod Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	
28a. Production - Interval B									
Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

\*(See instructions and spaces for additional data on page 2)

**RECEIVED**  
**NOV 03 2009**  
**DIV. OF OIL, GAS & MINING**

## 28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

## 28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

## 29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

## 30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

## 31. Formation (Log) Markers

## GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				GARDEN GULCH MRK GARDEN GULCH 1	3262' 3452'
				GARDEN GULCH 2 POINT 3	3542' 3798'
				X MRKR Y MRKR	4020' 4058'
				DOUGALS CREEK MRK BI CARBONATE MRK	4186' 4414'
				B LIMESTON MRK CASTLE PEAK	4520' 4952'
				BASAL CARBONATE TOTAL DEPTH (LOGGERS)	5363' 5447'

## 32. Additional remarks (include plugging procedure):

(A3) 4664-4672', (A1) 4624-4642', (A.5) 4560-4566'

## 33. Indicate which items have been attached by placing a check in the appropriate boxes:

- ☐ Electrical/Mechanical Logs (1 full set req'd.)
 ☐ Geologic Report
 ☐ DST Report
 ☐ Directional Survey
- ☐ Sundry Notice for plugging and cement verification
 ☐ Core Analysis
 ☐ Other:

## 34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)\*

Name (please print) Tammi LeeTitle Production Clerk

Signature \_\_\_\_\_

Date 01/05/2009

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 3)

(Form 3160-4, page 2)